

SkyNode® S200

Flight Tracking, Voice, and Flight Data Messenger

PTA12-100
Airborne Telephone Dialer/Adapter



RC6000/A
Control and Display Panel



Deklin DT-100
Handset



Iridium DPL
Handset



SkyNode S200

Optional Dialers compatible with the SkyNode S200

2-way reliable voice, data networking, and messaging from anywhere.

SkyNode® S200 is the world's lightest and most versatile integrated aeronautical satcom device. The S200 interfaces to multiple mapping and data management systems and is remotely configurable.

Our installation-ready kits include:

- S200-011 Voice, Tracking, Messaging Transceiver install Kit: One voice/data channel for cockpit and attendant communications, flight tracking, and messaging. Interfaces to a standard aviation audio panel. Phone dialing is via DPL handset, RC6000/A, iPhone, or iPad. Complete with antenna and connectors.
- S200-021 POTS Voice and Data Transceiver Kit: One voice/data channel. Interfaces to PTA12, DT-100, and other POTS compatible handsets. Multiple handsets can be installed. Complete with antenna and connectors.



The SkyNode S200 is supported by WebSentinel, Latitude's web-based data management services, and our server-side flight data management utilities.

Call today and speak with a DAC representative about the DL150 SDU and our other reliable satcom voice and flight data management solutions.

DACInternational

800.527.2531 P: 512.331.5323 F: 512.331.4516
www.dacint.com sales@dacint.com



SkyNode® S200


Flight Tracking, Voice, and Flight Data Messenger

SYSTEM FEATURES

- Auxiliary GPS serial data output for moving map, electronic flight bag and 406 ELTs
- Automated event-based reporting including Weight on Wheels/Skids and Out/Off/On/In messages
- Complete voice satellite communications in a single enclosure
- Meets forestry AFF live tracking requirements
- Reliable 2-way data networking/messaging
- Remote polling and configuration
- Data logging and event triggers from external switches/buttons and system bus sources
- Internal fast-fix 20 channel WAAS GPS receiver
- Multiple voice communication interface options
- Versatile mounting configurations
- Background data logging

ELECTRICAL, DATA, AND RF INTERFACES

- Power input voltage: 12-34 VDC
- Current: 0.5 A nominal, @ 28 VDC 0.8 max A during transmit
- Serial data ports for Laptop/messaging terminal
- Bluetooth/WiFi capable for messaging with Blackberry, Android and other PDAs
- I/O support for remote switches and indicators
- ARINC-429 receive bus interface (xx2 models)
- RS-485 serial data bus interface (xx2 models)
- 2-wire POTS phone interface (x2x models)
- RS-485 serial data bus interface (xx2 models)
- R6000/A interface for panel mounted messaging satcom dialing applications (X1X models)
- Antenna options: Individual GPS and Iridium antenna or dual element GPS/Iridium antenna

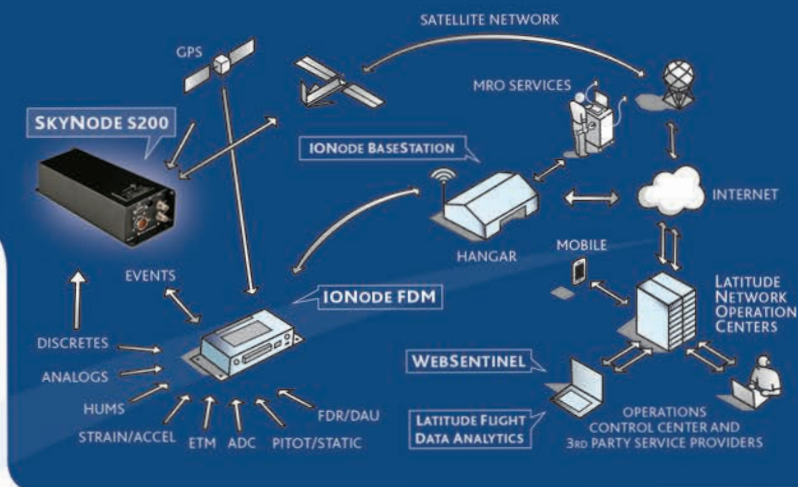

PHYSICAL SPECIFICATIONS

- Size: 11.50" x 3.81" x 2.75" (29.2 x 9.7 x 7.2 cm)
- Weight: 3.08 lbs (1400 g)

ENVIRONMENTAL QUALIFICATIONS

- Operating Temperature range: -45° to +70° C
- Humidity: >95%
- Altitude: 50,000 ft
- DO-160E Env. Cat. B2-BAB[(SM)(U2F)]XXXXXXXXZBBXXBXXXXX

APPROVALS

- FAA, TCCA and EASA STCs are available for over 900 different helicopters and fixed-wing aircraft



SAFR™ is Latitude's combination of equipment and services to provide a safer, more cost effective flight operations and maintenance environment—no matter what aerospace sector, aircraft or mission type.



Allow us to show you how the SkyNode S200 can improve your fleet operations.

DACInternational

800.527.2531 P: 512.331.5323 F: 512.331.4516
www.dacint.com sales@dacint.com

